


To enable a PC to collect cash register data over a remote link, where a portion of the distance is covered only by telephone line, an Ether-Serial Link's serial port is configured to operate in RAS server mode.

In this scenario, RAS server mode gives an IP address to the data-collecting PC, even though it has no direct access to the IP network.



**Lava Ether-Serial Link
Integration design using RAS server mode
to collect data from IP-based cash registers**

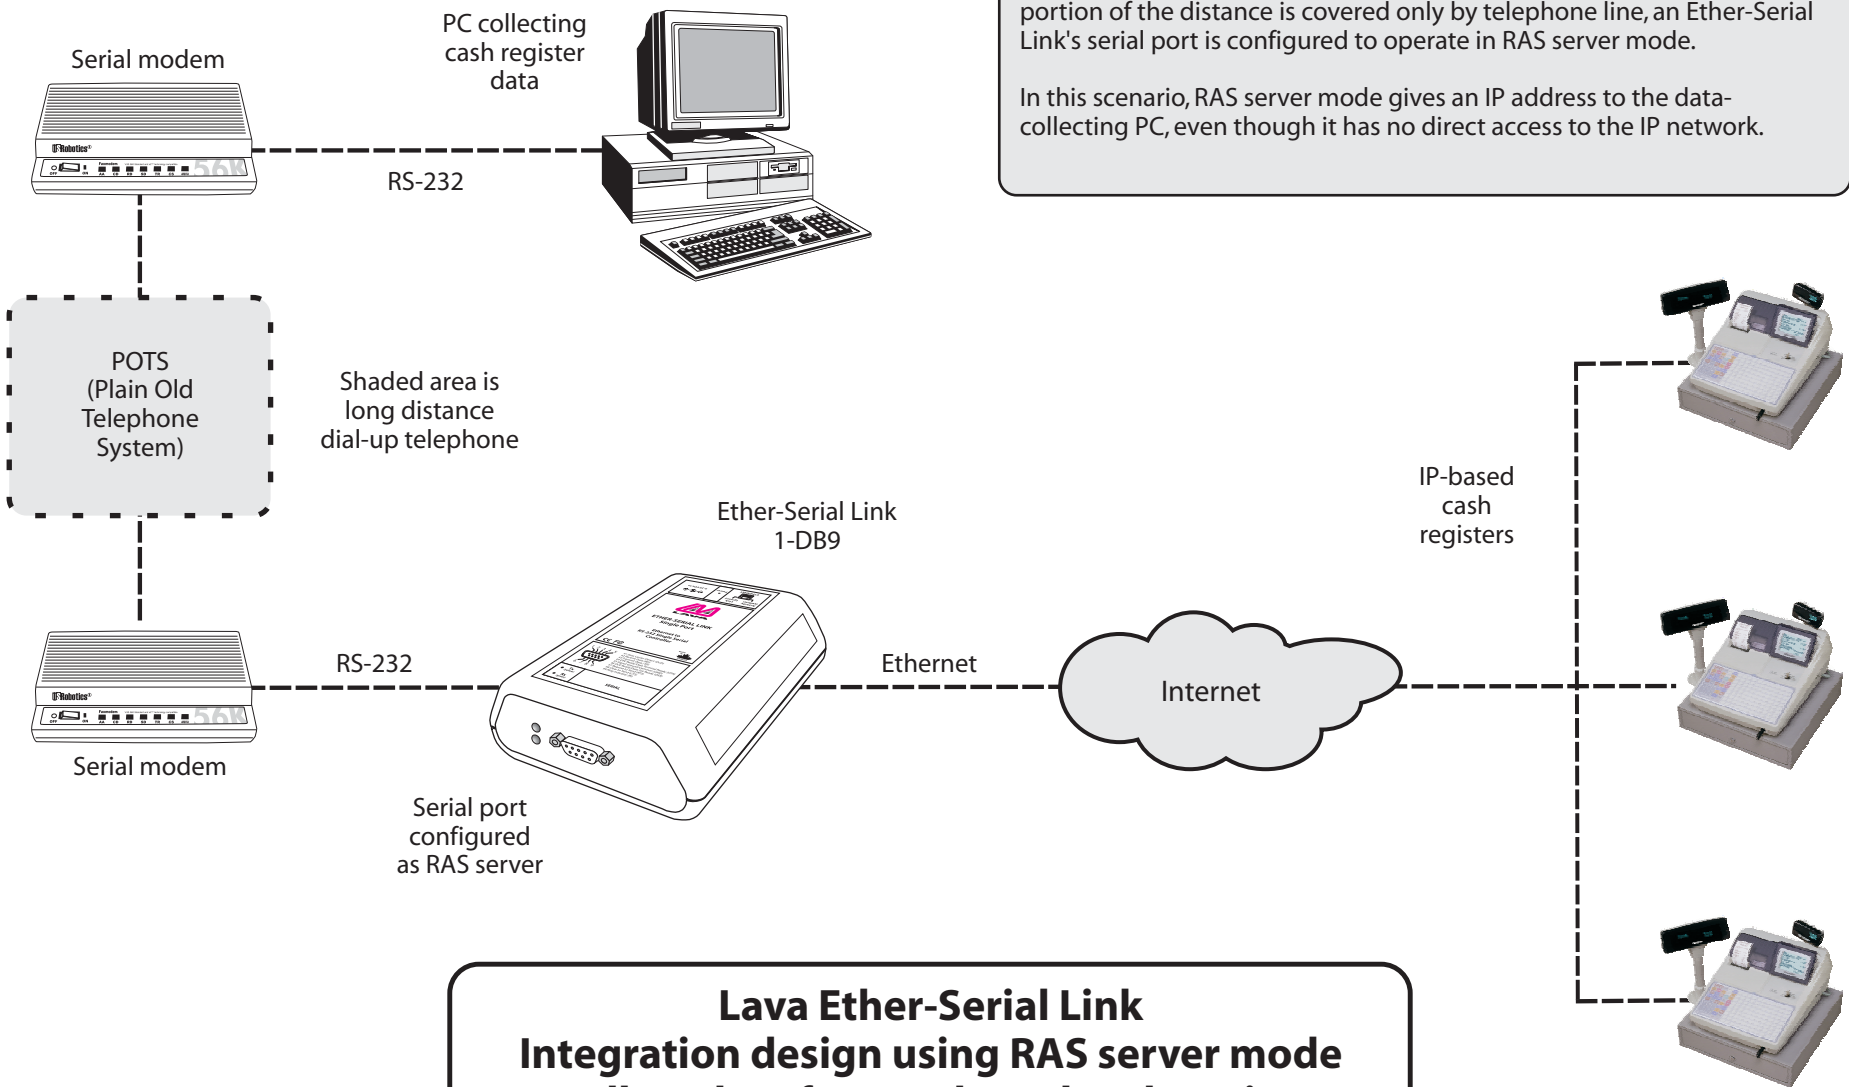