

LAVA 2SP-PCle [DB-9, DB-25]

PCle Bus 16550 Dual Serial Board and EPP
Parallel Port Board

Features & Benefits

- Adds one 9-pin 16550 UART serial port, one 25-pin 16550 serial port, and one EPP parallel port to PCle equipped PCs
- Serial ports are capable of a maximum throughput rate of 115.2 kbps
- One 25-pin EPP parallel port
- Easy Plug and Play installation—automatically selects next available IRQ and I/O addresses
- Compatible with any RS-232 serial or parallel peripheral
- LAVA Lifetime Warranty


Connectors

- One DB-9 male RS-232
- One DB-25 male RS-232
- One DB-25 female EPP

System Requirements

- PCle host slot (1x, 2x, 4x, 8x, 16x)
- Windows OS

Drivers ship with product. For updated software support visit www.lavalink.com.

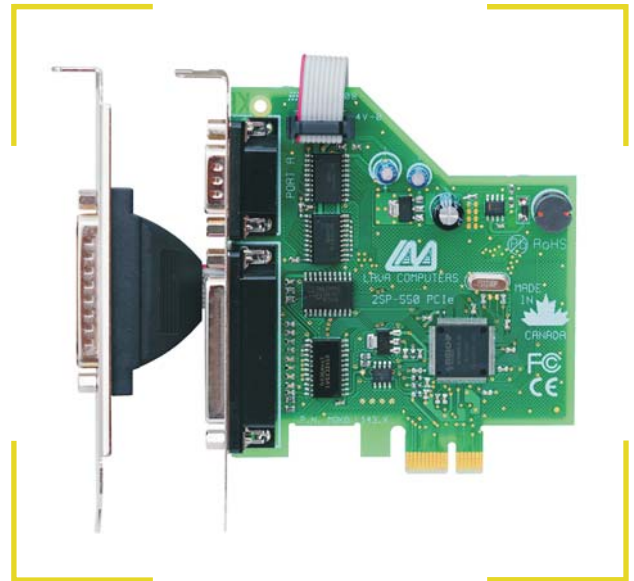

Copyright ©
LAVA Computer MFG Inc.
Printed in Canada.
Specifications subject
to change without notice.

