

LAVA DSerial-PCIe/LP FHB (full height bracket)

PCIe Bus Dual 16550 Serial Board with fan-out cable (low profile PCB with full height bracket)

Features & Benefits

- Adds two 9-pin 16550 UART serial ports to PCIe equipped PCs
- Each port is capable of a maximum throughput rate of 115.2 kbps
- Easy Plug and Play installation—automatically selects next available IRQ and I/O addresses
- Includes LAVA Com Port Redirect Utility for renaming Com ports—allows for backward compatibility with software that supports Com 1-4 only
- Compatible with any RS-232 serial peripheral
- Includes fan-out cable
- LAVA Lifetime Warranty


Connectors

- Two DB-9 male RS-232

System Requirements

- PCIe host slot (1x, 2x, 4x, 8x, 16x)

Drivers ship with product. For updated software support and current driver information visit www.lavalink.com.

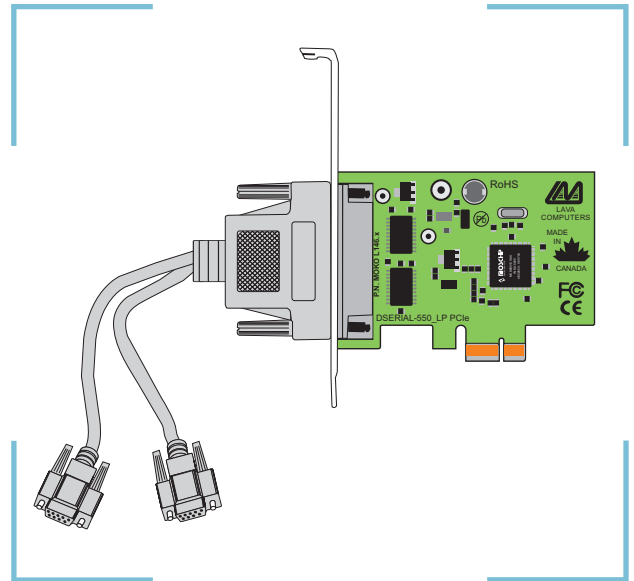

Copyright ©
LAVA Computer MFG Inc.
Printed in Canada.
Specifications subject
to change without notice.

