

LAVA SSerial-PCI/LP FHB (full height bracket)

PCI Bus Single 16550 Serial Board (low profile PCB with full height bracket)

Features & Benefits

- Adds one 25-pin 16550 UART serial port to PCI equipped PCs
- Port is capable of a maximum throughput rate of 115.2 kbps
- Easy Plug and Play installation—automatically selects next available IRQ and I/O addresses
- Includes LAVA Com Port Redirect Utility for renaming Com ports—allows for backward compatibility with software that supports Com 1-4 only
- Compatible with any RS-232 serial peripheral
- LAVA Lifetime Warranty


Connector

- One DB-25 male RS-232

System Requirements

- PCI host slot (5 volt)

Drivers ship with product. For updated software support and current driver information visit www.lavalink.com.

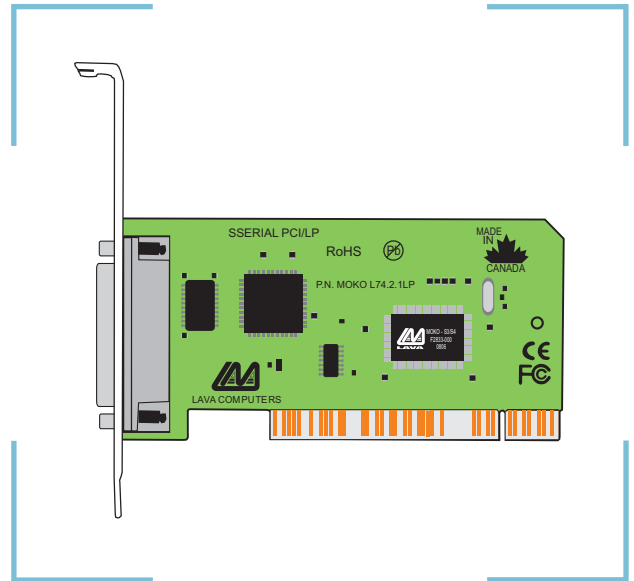

Copyright ©
LAVA Computer MFG Inc.
Printed in Canada.
Specifications subject
to change without notice.

